

CENTRIFUGES



CHARACTERISTICS

- The swarf must be short or not larger in size than 2 x 1 or 2 cm
- The swarf must not contain pieces (end of bar, bar headers, processed parts, ...). Pieces in the order of cm are tolerated

DESCRIPTION

The **FC300** centrifuge is a unit suitable for centrifuging metal, ferrous and non-ferrous swarf, in order to recover the cooling lubricant used by the machine tool in the production process.

The **FC300** centrifuge is designed for continuous feeding and for the treatment of metal chips, not exceeding 2 cm in length.

Under optimal conditions, the **FC300** centrifuge allows to obtain swarf with a wet content that can reach up to 1.5%. The actual efficiency of the centrifuge, as well as the actual hourly flow rate, depends on the characteristics of the swarf, in particular the material, the shape, the weight per unit of volume, as well as the starting humidity and can be confirmed by testing your swarf at our premises. If there are pieces in the swarf, such as bar headers, semi-finished products or bar ends, the **FC300** centrifuge should be equipped with a vibrating screen.

- The centrifuge must be loaded continuously and uniformly to ensure maximum performance
- A minimum washing flow rate must always be guaranteed, to avoid deposits and clogging

OPTIONAL

- Customised support structure made of sturdy painted metalwork with discharge hopper to be anchored to the floor
- Painting in RAL different from the standard
- Cutting fluid collection tank with level sensors and transfer pump ($H_{max} = 1$ bar, $Q_{max} = 240$ l/min)
- Electrical control panel

SUPPLY

- Structure made of sturdy metalwork painted RAL 7016, anchored to a thick and rigid platform
- All parts in contact with the swarf are made of special wear-resistant materials
- Anti-vibration dampers to reduce vibrations
- Drain of recovered cooling lubricants
- Washing inlet valve
- Centrifuge washing pump
- Drain pipe of recovered cooling lubricant of standard length of 2 m
- Unbalancing sensor
- Junction box and wiring



COOLANT RECOVERY



SMALL SIZE



HIGH PERFORMANCE


FAMA RESERVES THE RIGHT TO MAKE CHANGES TO THE PRODUCT WITHOUT NOTICE

Uffici e Produzione/Offices and production site: Via Moraro, 19 - 36030 Montecchio Precalcino (VI) Italy- Tel.+39 0445 363950 fax +39 0445 386068
 Sede Legale/ Registered office: Via S. Antonio,11- 36030 Fara Vicentino (VI) Italy C.F./P.I.: IT 02290490248 Cap. Soc. € 100.000,00 R.E.A. VI 220095
www.famaproject.com e-mail info@famaproject.com

CENTRIFUGES

APPLICATION ANALYSIS EXAMPLE

A wet residue of 2% was obtained on a 400 kg sample of brass with a 15% wet content. 52 kg of oil were recovered in 1 hour. Assuming working 8 hours a day, for 220 days of the year, the following amount will be recovered: 91,520 kg of oil per year.

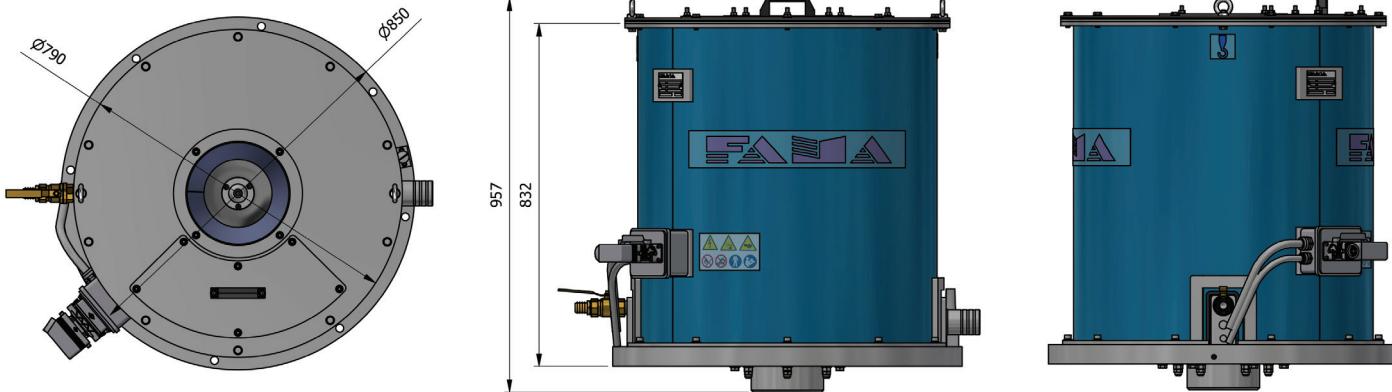

NOTE: Residual swarf moisture after centrifugation can be confirmed by testing your swarf sample

TECHNICAL DATA

| | |
|--------------|--------------|
| DIMENSIONS | 850 X 960 mm |
| WEIGHT | 300 kg |
| POWER | 1,1 kW |
| VOLTAGE | 230/400 V |
| POWER SUPPLY | Continuous |
| RPM | 1.480 rpm |

HOURLY PRODUCTION

| Q = 400 l/h | BRASS | STEEL | ALUMINIUM | STAINLESS STEEL | COPPER | CAST IRON |
|------------------|-------|-------|-----------|-----------------|--------|-----------|
| Δ density [kg/l] | 1,2 | 1,1 | 0,4 | 1,1 | 1,5 | 1,4 |
| kg/h | 480 | 440 | 160 | 440 | 600 | 560 |

The data in kg/h are approximate and in any case depend on the density of the swarf, the shape, the oil content and the type of coolant. The density data considered are hypothetical, based on an experimental average of the data in our possession.

FAMA RESERVES THE RIGHT TO MAKE CHANGES TO THE PRODUCT WITHOUT NOTICE

Uffici e Produzione/Offices and production site: Via Moraro, 19 - 36030 Montecchio Precalcino (VI) Italy- Tel.+39 0445 363950 fax +39 0445 386068
 Sede Legale/ Registered office: Via S. Antonio,11- 36030 Fara Vicentino (VI) Italy C.F./P.I.: IT 02290490248 Cap. Soc. € 100.000,00 R.E.A. VI 220095
www.famaproject.com e-mail info@famaproject.com